



高鐵儀器 精密卓越




GOTECH "the best partner" to raise your competition

GT-7012-DH1 高溫型DIN耐磨耗試驗機 Din Abrasion Resistance Tester

BS-903、GB/T 9867、ISO-4649、JIS-K6264、SATRA TM174、ASTM-D5963、QB/T 2884-2007、ISO 20871:2001、BS EN 12770:2000

本機適用於聚酯鞋底、成鞋鞋底及聚合物片狀材料的耐磨性能。

The GT-7012-DH1 is designed for determining the resistance of polyester soles, outsoles and polymer sheet materials to abrasion. The abrasive resistance is assessed by measuring the abrasion loss after the specimen is rubbed against sandpaper for a specified travel distance. The drum of this tester can be heated up to 150°C to meet the demand of temperature control.

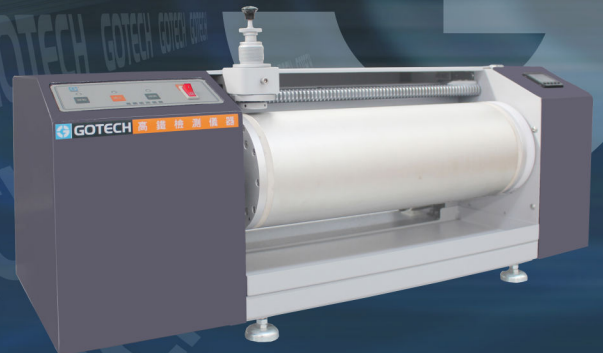

溫度 Temp. range	常溫 Ambient temp. +10~150°C
加熱方式 Temp. control	滾筒加熱 Drum
負荷 Load	2.5 ± 0.1 N; 5.0 ± 0.1N; 10.0 ± 0.2N
夾具橫向位移量 Clamp lateral displacement	4.2 ± 0.04 mm/滾筒每圈 per rotation of drum
滾筒 Drum size	φ 150 ± 0.2 mm 長度 length of 460 mm
滾筒轉速 Drum rotating speed	40 ± 1 rpm
磨耗行程 Rubbing length	40 ± 0.2 m 相當於滾筒圈數轉84 equal to 84 drum rotations
傾角 Inclined angle	3°(試樣夾持器中心軸與滾筒旋轉方向垂直面夾角 between central axle of specimen holder and vertical position of drum)
砂紙 Sandpaper	粒度60 #,平均厚度為1 ± 0.2 mm,寬度至少400 mm
體積(約) Dimension (approx.)	75 cm × 40 cm × 40 cm
重量(約) Weight (approx.)	61 kg
電源 Power	1φ AC220V (依國別或指定 or specify)

瞭解更多產品信息，請登錄我司網站 www.gotech.biz



創於1977年
高鐵科技股份有限公司

GOTECH TESTING MACHINES INC.

本廠: 台中市工業區24路28號

二廠: 台中市工業區24路31號

TEL: (04)23590061 FAX: (04)23591553

網址: www.gotech.biz E-mail: gt112@gotech.biz

高鐵檢測儀器(東莞)有限公司

GOTECH TESTING MACHINES CO., LTD.

地址: 廣東省東莞市南城區宏圖高新科技開發區宏三路

TEL: 0769-89986666 22400899 FAX: 0769-22400699

E-mail: gt-d130@gotech.biz 手機: 13926831580

高特威爾檢測儀器(青島)有限公司

GOODTECHWILL TESTING MACHINES CO., LTD.

地址: 中國青島市市北區哈爾濱路52號青建太陽島1號商務樓8層

TEL: 0532-85931956 85931957 FAX: 0532-85931950

E-mail: gt-q101@gotech.biz 手機: 13708970121